

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number  
**WO 2005/016033 A1**

(51) International Patent Classification<sup>7</sup>: **A23L 3/10**

(21) International Application Number:  
PCT/US2004/010857

(22) International Filing Date: 8 April 2004 (08.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/621,190 15 July 2003 (15.07.2003) US

(71) Applicant (for all designated States except US): **FMC TECHNOLOGIES, INC.** [US/US]; 200 East Randolph Drive, Chicago, IL 60601 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PERSOONS, Gustaaf** [BE/BE]; Rozenlaan 13, B-2960 Brecht (BE).

(74) Agent: **NAGAE, Jerald, E.**; Christensen O'Connor Johnson Kindness PLLC, 1420 Fifth Avenue, Suite 2800, Seattle, WA 98101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: **METHOD OF PROCESSING PAPERBOARD CONTAINERS**

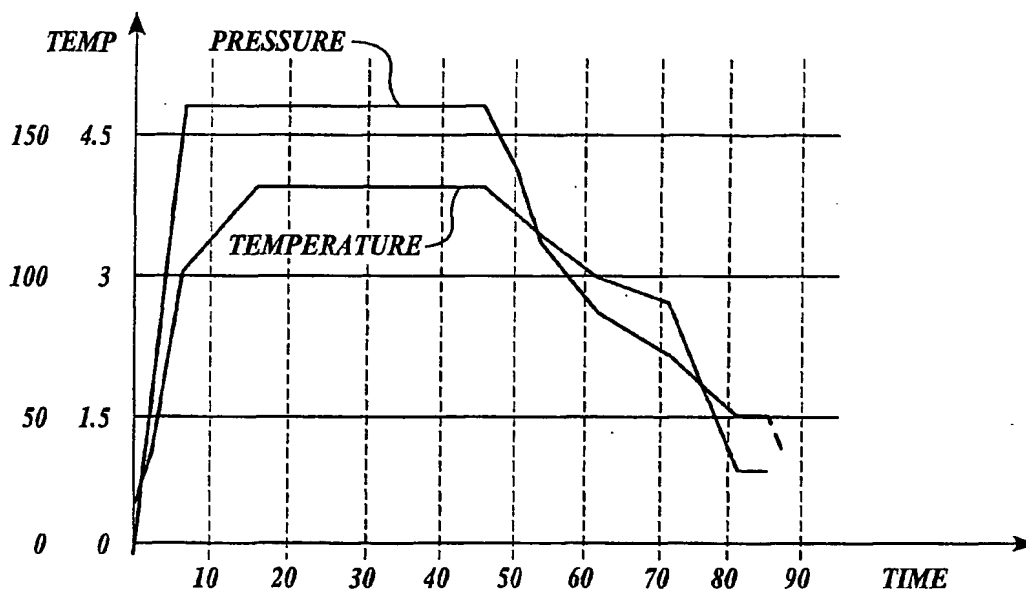

(57) Abstract: Described is a method of processing a fiber-based container in a retort vessel that includes subjecting the container to a cooking phase and a cooling phase. During the cooling phase, the difference between the pressure in the vessel and the pressure in the fiber is minimized and kept preferably negative, thereby discouraging moisture ingress in any exposed fibrous surface.

WO 2005/016033 A1



---

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## METHOD OF PROCESSING PAPERBOARD CONTAINERS

### FIELD OF THE INVENTION

The present invention relates to retort systems for in-container preservation of  
5 foodstuffs, and more particularly, to retort systems for use with containers formed from  
materials having a fiber-based (e.g., paperboard) material component.

### BACKGROUND OF THE INVENTION

In-container processing of foodstuffs is carried out in either batch or continuous  
pressure sterilizers. The batch systems consist of using one or more retorts in which a  
10 load of containers is treated. The treatment generally follows a time, pressure, and  
temperature profile that is predefined so that containers located in the "coldest" region of  
the load will still be subjected to a sufficient lethality in order to ensure that the food  
inside is rendered wholesome.

Sterilizing temperatures provided within the retort are typically in the range of  
15 115°C. to 130°C. These temperatures can cause an overpressure to build inside the  
container. Early food containers, such as tin plated cans, were strong enough to be  
processed in early retort systems. These systems typically used steam only in order to  
provide the necessary sterilization temperature. The tin containers were able to withstand  
the resulting pressure differential that formed between the inside of the container and the  
20 pressure of the saturated steam that corresponded to the sterilization temperature in the  
retort, especially during cooking when the pressure in the container would be greater than  
that in the vessel.

Over the years, processors have tried to reduce the cost of the containers used,  
including reducing the thickness of tin plate. In addition, other types of containers and  
25 packaging materials have been considered, some of which have not been implemented  
because of their inability to accommodate the pressure differential. Another  
improvement to the food processing industry has been the introduction of agitation in the  
retorts, which enables processors to increase the process temperatures while maintaining  
(and even improving) the qualitative aspects of the foodstuffs.

These developments have led to the introduction of retorts in which an additional partial pressure is created by introducing air inside the vessel. To assure good and consistent heat transfer to the containers, typically, either the steam/air mixture is moved and constantly mixed with a fan, or a small quantity of superheated water is introduced in the vessel and continuously sprayed or trickled over the load. The pressure inside the retort is separately regulated and the profile during the complete process is made such that the packages are not subjected to inadmissible pressure differentials. Further, in the case of, for example, pouches, the pressure is regulated so that the pouch shape is maintained. This allows the container to keep its heat transfer characteristics corresponding to its particular shape.

Regulating pressure within the vessel also accommodates the need to counterbalance the pressure within the container during the process. In some cases, the internal pressure of the container is sufficient to cause the container to burst open if an opposing pressure were not provided in the vessel. As is the conventional understanding of those skilled in the art, for certain types of flexible containers, there is no concern having the total vessel pressure be greater than the pressure in the container due to the process temperature, since the container will automatically deform and the two pressures (i.e., the total vessel pressure and the total pressure within the container) will equalize.

FIGURE 1 shows typical steps in a retort sterilization process, e.g., a steam-water-spray system, for use with flexible containers. These containers are sealed and do not have an exposed paperboard edge. The process consists of a come-up phase, a cooking phase, and a cooling phase. In the come-up phase, the retort temperature is increased from a base amount up to a sterilization temperature (shown in FIGURE 1 to be about 121°C). Similarly, the pressure within the retort vessel is regulated to increase from a base amount to about a 2 bar overpressure. During the cooking phase, the sterilization temperature and total vessel pressure are maintained for a predetermined time.

The cooling phase includes a micro-cooling portion whereby the temperature of the circulating water is slowly reduced to avoid any sudden vapor collapse taking place in the vessel. Such an event would lead to abnormal pressure differentials between the pressure within the container and the pressure in the retort vessel. (If done too quickly, the pressure within the container may not reduce rapidly enough thereby causing the container to burst open.) The cooling phase also includes a full cool portion to cool down

the load, usually done as fast as possible. The various phases each have their own set rates of temperature and pressure change.

Recently, a new container material was introduced on the market. The new material has a multilayered compound made from a paperboard material that is coated with several polymer layers and coatings. See, for example, packaging material described in applications WO 97/02140, WO 02/28637, and WO 02/22462, incorporated herein by reference. In one embodiment, closed containers made of this type of packaging material have exposed paperboard edges. According to manufacturers of such materials, the paperboard edges are readily capable of transferring air molecules so that the pressure within the paperboard wall itself is the same as the pressure in the vessel during processing. During the cooking and the initial cooling phases, it has been recommended to maintain a relatively high level of total vessel pressure to avoid having these newer types of paperboard containers burst open.

In attempting to use this new material in a conventional retort sterilization batch process of closed flexible containers, however, water penetration into the exposed paperboard edges has been experienced at unacceptably high levels. Water penetration in these edges can be tolerated in only small amounts before the integrity of the package is compromised. It was found, further, that this phenomenon worsens when such containers are processed in agitation mode.

Thus, a problem exists in how to avoid moisture absorption in an exposed paperboard edge of a closed container during processing. The present invention addresses this problem and others, as described below.

### SUMMARY OF THE INVENTION

The present invention is a method of processing a food product in a closed environment, such as a conventional retort vessel. The method includes placing the container in the vessel and conducting cooking and cooling phases therein using predefined temperature, pressure, and time profiles. According to the invention, during the cooling phase, the vessel temperature and pressure are actively controlled in a manner to minimize fluid absorption in any exposed fibrous surface. In one embodiment, this is accomplished by reducing the temperature according to a predefined schedule and by simultaneously reducing the vessel pressure in a manner that follows the reduction in

pressure resulting from the temperature reduction. In another embodiment, the vessel pressure is actively controlled to a value less than the pressure change corresponding to the reduction in temperature. In practicing the present invention, processing can be done quickly and without significant amounts of fluid absorption within the fibrous material.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing aspects and many of the attendant advantages of this invention will become more readily appreciated by reference to the following detailed description, when taken in conjunction with the accompanying drawings, wherein:

FIGURE 1 is a graph of a prior art retort process showing temperature and  
10 pressure set points within the retort vessel; and

FIGURE 2 is a graph of the steps listed in TABLE I and their corresponding temperature and pressure control values for use in an agitation-type retort vessel; and

FIGURE 3 is a graph of the theoretical temperature and pressure values corresponding to the amounts given in TABLE II.

## 15 DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The inventor herein has determined, contrary to the understanding of those skilled in the art, that moisture penetration into a paperboard edge can occur because the total pressure within the retort vessel is greater than the total pressure within the paperboard material itself during the cooling phase, and particularly during the initial cooling step.

20 When the cooling phase is started and the temperature within the vessel is decreased, a corresponding pressure change occurs within the vessel. A pressure regulator in the retort compensates for this drop by adding pressure into the vessel (by inserting additional air). As the containers are sprayed or trickled with cooler process water, a pressure drop will occur in the paperboard material. The inventor herein has  
25 surmised that the partial pressure added into the vessel does not occur quickly in the paperboard, as well. Thus, during a short period of time, the pressure in the vessel can be greater than the pressure within the paperboard material, and, consequently, surrounding moisture is driven into the exposed paperboard edges. As time goes on, the temperature and pressure values within the vessel, within the paperboard material, and within the  
30 closed container will equalize. But when these values are not the same, there is a

tendency for a lower pressure within the paperboard material to draw fluid inward through any exposed surface.

Thus, according to the present invention, to avoid or reduce this ingress of moisture, it is advisable to externally control the total vessel pressure and to actively  
 5 reduce it in a manner that corresponds to the reduction in temperature during the cooling phase, particularly during initial cooling. This may be done in various ways.

TABLE I below is one embodiment of a method of processing a paperboard container formed in accordance with the present invention, for use in an agitation retort system. For each portion of time, the conditions within the vessel are set at a  
 10 predetermined temperature (labeled "Tset point") and pressure (labeled "Pset point"). Each portion continues for a specified period of time (labeled "Time (Min)"). The type of temperature and pressure control within the time period is also given. Here, they are either ramped or stepped amounts. Other functions could be used instead, depending on the application.

15 In TABLE I, the initial cooling step (phase 5) has a duration of 4 minutes. During this time, the vessel control temperature is ramped down from 130°C to 122°C. Simultaneously, the vessel control pressure is ramped down from 4.8 bar o.p. to 4 bar o.p. The remaining steps are interpreted similarly.

20 TABLE I

Phase	Name	Time (Min)	Type Temp	Type Press	Tset point (°C)	Pset point (Bar)
1	Come up	2	Ramp	Step	35	2
2	Come up	4	Ramp	Ramp	100	4.8
3	Come up	11	Ramp	Ramp	135	4.8
4	Cook	30	Hold	Hold	130	4.8
5	Cool (initial)	4	Ramp	Ramp	122	4
6	Cool	4	Ramp	Ramp	114	3.4
7	Cool	8	Ramp	Ramp	99	2.6
8	Cool	4	Ramp	Ramp	95	2.36
9	Cool	5	Ramp	Ramp	90	2.16
10	Cool	10	Ramp	Ramp	30	1.5

Phase	Name	Time (Min)	Type Temp	Type Press	Tset point ( °C )	Pset point (Bar)
11	Cool	5	Hold	Hold	30	1.5
12	End and vent					

Steps 5-9 illustrate the inventive aspect of reducing pressure within the vessel in a manner that corresponds to the reduction in temperature. The control pressure set points are based on TABLE II below in which the theoretical pressure is calculated as a function of temperature.

Theoretically, for each temperature drop in the vessel, a corresponding vapor pressure drop occurs as indicated in conventional steam saturation lines. In addition, for each temperature drop in the vessel, a corresponding air pressure drop occurs as per the general gas law equation (i.e., pressure times volume divided by temperature equals a constant). In the present invention, the vessel pressure is controlled in a manner to correspond to the pressure drop that occurs in the paperboard web as a result of the temperature reduction.

In TABLE II below, the calculated values of the vapor pressure and the air pressure are shown, and used to determine the target set-points for the cool phases. In practice, a large number of little pressure reductions can be created during cooling, following the theoretical drop accurately. However, in order to keep the programming practical and simple, this ramp-down may be done in only a few phases whereby the target setpoints are put somewhat below the theoretical values, so as to provide a safety margin on the maintaining of a positive pressure inside the paperboard versus that in the vessel. Thus, the values in the sixth column are slightly less than those in column five of TABLE II. These are the values used in TABLE I (expressed in overpressure terms).

Referring to TABLE II, the first column, labeled "Time", indicates the time of events in the cooling phase of the sterilization process. The second column, labeled "Temp", is the target temperature controlled to within the retort vessel. The third column, labeled "Pvapor", is the theoretical vapor pressure according to known steam saturation data for the corresponding temperature. The fourth column, labeled "Pair", is the theoretical partial air pressure within the vessel, starting at 130°C to obtain 5.8 bar absolute pressure and corrected for pressure reduction according the general gas law, as a



function of temperature. The fifth column, labeled "Ptot", is the theoretical total pressure related to temperature, i.e., the sum of P<sub>vapor</sub> and P<sub>air</sub>. The sixth column, labeled "P<sub>vessel</sub>", is the set point for pressure control in the vessel.

5

TABLE II

Phase	Time	Temp	P <sub>vapor</sub>	+ P <sub>air</sub>	= P <sub>tot</sub>	P <sub>vessel</sub>
	0	130	2.70130	3.09870	5.80000	5.8
	0.5	129	2.62150	3.091014	5.71251	5.7
	1	128	2.54350	3.083328	5.62683	5.6
	1.5	127	2.46750	3.075641	5.54314	5.5
	2	126	2.39330	3.067955	5.46126	5.4
	2.5	125	2.32100	3.060269	5.38127	5.3
	3	124	2.25040	3.052583	5.30298	5.2
	3.5	123	2.18160	3.044896	5.22650	5.1
5	4	122	2.11450	3.03721	5.15171	5
	4.5	121	2.04920	3.029524	5.07872	4.925
	5	120	1.98540	3.021838	5.00724	4.85
	5.5	119	1.92330	3.014152	4.93745	4.775
	6	118	1.86280	3.006465	4.86927	4.7
	6.5	117	1.80390	2.998779	4.80268	4.625
	7	116	1.74650	2.991093	4.73759	4.55
	7.5	115	1.69060	2.983407	4.67401	4.475
6	8	114	1.63620	2.97572	4.61192	4.4
	8.5	113	1.58320	2.968034	4.55123	4.35
	9	112	1.53160	2.960348	4.49195	4.3
	9.5	111	1.48150	2.952662	4.43416	4.25
	10	110	1.43270	2.944976	4.37768	4.2
	10.5	109	1.38520	2.937289	4.32249	4.15
	11	108	1.33900	2.929603	4.26860	4.1
	11.5	107	1.29410	2.921917	4.21602	4.05
7	12	106	1.25040	2.914231	4.16463	4

Phase	Time	Temp	Pvapor	+ Pair	= Ptot	Pvessel
	12.5	105	1.20800	2.906544	4.11454	3.95
	13	104	1.16680	2.898858	4.06566	3.9
	13.5	103	1.12670	2.891172	4.01787	3.85
	14	102	1.08780	2.883486	3.97129	3.8
	14.5	101	1.05000	2.8758	3.92580	3.75
	15	100	1.01325	2.868113	3.88136	3.7
	15.5	99.5	0.99543	2.86427	3.85970	3.65
8	16	99	0.97761	2.860427	3.83804	3.6
	16.5	98.5	0.96031	2.856584	3.81689	3.57
	17	98	0.94301	2.852741	3.79575	3.54
	17.5	97.5	0.92623	2.848898	3.77512	3.51
	18	97	0.90944	2.845055	3.75449	3.48
	18.5	96.5	0.89315	2.841212	3.73436	3.45
	19	96	0.87686	2.837368	3.71423	3.42
	19.5	95.5	0.86106	2.833525	3.69459	3.39
9	20	95	0.84526	2.829682	3.67494	3.36
	20.5	94.5	0.82994	2.825839	3.65577	3.34
	21	94	0.81461	2.821996	3.63661	3.32
	21.5	93.5	0.79975	2.818153	3.61790	3.3
	22	93	0.78489	2.81431	3.59920	3.28
	22.5	92.5	0.77049	2.810467	3.58095	3.26
	23	92	0.75608	2.806624	3.56270	3.24
	23.5	91.5	0.74212	2.80278	3.54490	3.22
	24	91	0.72815	2.798937	3.52709	3.2
	24.5	90.5	0.71462	2.795094	3.50971	3.18
10	25	90	0.70109	2.791251	3.49234	3.16

The pressures in TABLE II are expressed as "absolute pressures" in bars, not overpressures (or gauge pressures). The initial-cool phase and next step cool-phases of TABLE II are plotted in the graph of FIGURE 3.

While the preferred embodiment of the invention has been illustrated and described, it will be appreciated that various changes can be made therein without departing from the spirit and scope of the invention. For example, the present invention may be applied to various known processing techniques, such as those using spray water and steam, steam-air, trickling water, and others.

In addition, the present invention has been shown to result in successful processing of these types of packages in the agitation processes and can also be successfully applied to static processes. In both cases, moisture ingress has been shown to be minimal. The present invention may also be used in conjunction with other moisture ingress reduction techniques for use with flexible containers having a paperboard material component.

Further, while the embodiments described herein include an initial cool-down total pressure applied at 5.8 absolute pressure, other starting points may be used with their appropriate ramp-down rates as well. In addition, other temperature reduction rates and time periods may be used instead. For example, the initial cooling phase may be altered to occur more quickly, or more slowly. In one experiment, a ramped temperature reduction from 130°C to 100°C was accomplished successfully in approximately 10 minutes instead of the approximate 15 minutes shown above in TABLE I.

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method of processing a food product in a retort vessel comprising:
  - (a) placing the food product in a container having a fiber-based material component and sealing the container closed, the container having at least one exposed edge of paperboard;
  - (b) placing the closed container in the vessel and cooking the food product therein including regulating the interior conditions of the vessel using a control temperature and a control pressure; and
  - (c) cooling the food product within the vessel;
  - (d) wherein cooling the food product includes reducing the control temperature within the vessel according to a predefined temperature schedule and reducing the control pressure within the vessel according to a predefined pressure schedule; at least portions of the pressure schedule following the reduction in pressure resulting from the temperature schedule.
2. The method according to Claim 1, wherein cooling includes an initial cooling phase and wherein the pressure schedule tracks the corresponding pressure reduction due to the concurrent reduction in temperature during the initial cooling phase.
3. The method according to Claim 1, wherein the method of processing a food product is an agitation method.
4. The method according to Claim 1, wherein the method of processing a food product is a static process.
5. The method according to Claim 1, wherein the pressure schedule follows a theoretical reduction in pressure resulting from the temperature schedule.
6. The method according to Claim 1, wherein during cooling the control pressure is equal to or less than the theoretical pressure resulting from the temperature schedule.
7. The method according to Claim 1, wherein cooling includes reducing the control pressure in the vessel in a ramped manner.

8. The method according to Claim 1, wherein cooking includes using at least one of spray water, trickling water, water vapor, superheated water, steam, and air.

9. The method according to Claim 1, wherein the control pressure reaches an amount greater than 1.1 bar overpressure during the cooking phase.

10. A method of batch processing a food product located in a closed container having a paperboard material component, the method comprising:

(a) closing the container using a packaging method whereby at least one edge of paperboard material is exposed to the conditions exterior to the container, and placing the closed container in a retort vessel;

(b) conducting a cooking phase within the vessel;

(c) conducting a cooling phase within the vessel, during which the temperature within the vessel is reduced; during the cooling phase, a pressure exists within the vessel and a pressure exists within the paperboard material at the at least one exposed edge;

(d) wherein the cooling phase includes controlling the pressure within the vessel in order to minimize the difference between the pressure in the vessel and the pressure in the paperboard material, thereby helping to prevent moisture from entering into the paperboard of the container.

11. The method according to Claim 10, wherein cooling includes reducing the pressure in the vessel at a rate in the range of about 0- bar/minute to about -0.25 bar/minute during a portion thereof.

12. The method according to Claim 10, wherein, during at least a portion of the cooling, the control pressure in the vessel is set to a value less than the pressure in the paperboard material at the at least one edge.

13. The method according to Claim 10, wherein the pressure in the vessel has a rate of reduction of less than about -0.25 bar/minute.

14. The method according to Claim 10, wherein the method of processing a food product is an agitation method.

15. The method according to Claim 10, wherein the method of processing a food product is a static process.

16. In a method of processing a fiber-based container containing a food product, the method including placing the container in a retort vessel, conducting a cooking phase within the vessel, and conducting a cooling phase within the vessel; an improvement to conducting the cooling phase comprising:

actively controlling the vessel pressure to a value equal to or less than pressure in the walls of the fiber-based container during at least a portion of the cooling phase.

17. The method according to Claim 16, wherein the vessel control pressure is set to an amount in the range of about 0 bar to about 0.4 bar less than pressure within the walls.


18. The method according to Claim 16, wherein pressure in the walls is determined based on theoretical calculations.

19. The method according to Claim 16, wherein the cooling phase includes an initial cooling phase, and wherein actively controlling the vessel pressure to a value equal to or less than pressure in the walls of the fiber-based container is done during the initial cooling phase.

20. The method according to Claim 19, wherein the initial cooling phase is equal to or less than about 16 minutes.


21. The method according to Claim 16, wherein the container includes an exposed edge and the vessel pressure is actively controlled to a value equal to or less than pressure in the walls of the fiber-based container at the exposed edge.

1/3

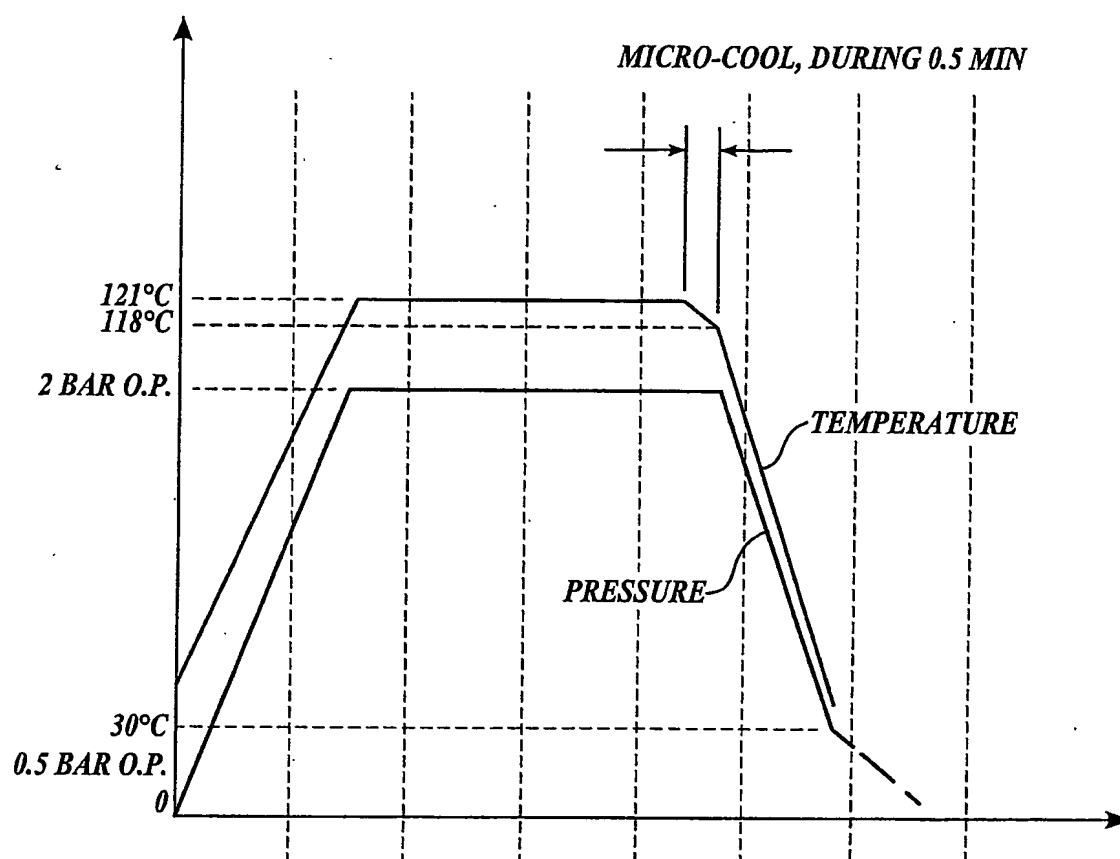


**Fig.1.**  
(PRIOR ART)

2/3

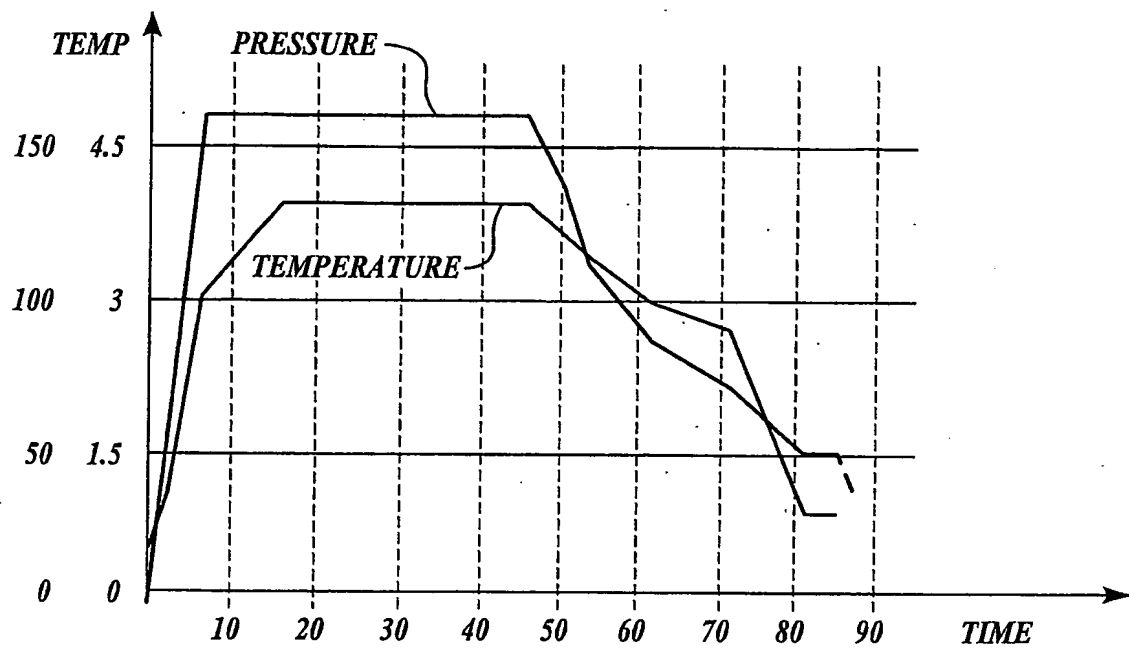*Fig.2.*



3/3

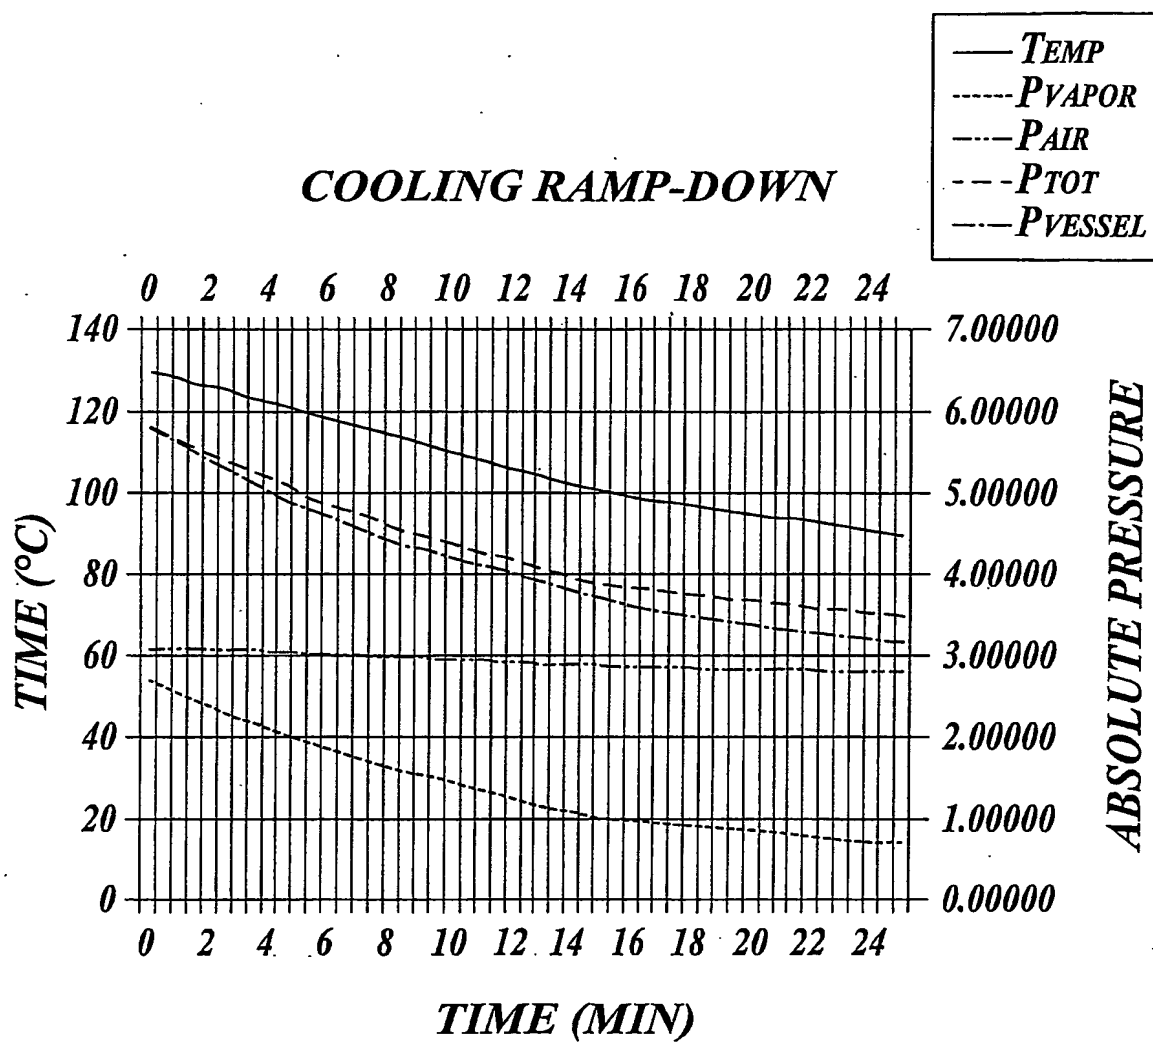**Fig.3.**

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US2004/010857

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A23L3/10

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A23L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, FSTA

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 874 580 A (SUGISAWA KO ET AL) 17 October 1989 (1989-10-17) the whole document	1-9
X	US 2 398 082 A (CAVALLITO CHESTER J) 9 April 1946 (1946-04-09) the whole document	1-9
X	US 4 816 269 A (COLVIN ARTHUR E ET AL) 28 March 1989 (1989-03-28) the whole document	1-9
E	WO 2004/056666 A (TETRA LAVAL HOLDINGS & FINANCE ; CHRISTENSEN AKSEL (SE); KJELGAARD TOM) 8 July 2004 (2004-07-08) the whole document	1-9
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

13 October 2004

Date of mailing of the international search report

13 DEC 2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Boddaert, P

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US2004/010857

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 6 177 048 B1 (LAGERSTEDT JAN) 23 January 2001 (2001-01-23) the whole document -----	1-9
A	US 1 953 656 A (MULLEN GEORGE W) 3 April 1934 (1934-04-03) -----	
A	US 5 472 042 A (VELTMAN JOOST ET AL) 5 December 1995 (1995-12-05) -----	
A	EP 1 287 751 A (ALTECH CO LTD ; TAKANO MOTOHARU (JP)) 5 March 2003 (2003-03-05) -----	
A	WO 02/28637 A (TETRA LAVAL HOLDINGS & FINANCE ; KJELGAARD TOM (SE); LETH IB (SE); AND) 11 April 2002 (2002-04-11) cited in the application -----	
A	WO 02/22462 A (TETRA LAVAL HOLDINGS & FINANCE ; LETH IB (SE); OEHRMAN PETER (SE)) 21 March 2002 (2002-03-21) cited in the application -----	
A	WO 97/02140 A (TETRA LAVAL HOLDINGS & FINANCE ; MAGNUSSON KATARINA (SE)) 23 January 1997 (1997-01-23) cited in the application -----	
A	US 5 283 033 A (DODRILL ROBERT K) 1 February 1994 (1994-02-01) -----	
A	US 3 531 300 A (GREENBERG SHELDON I ET AL) 29 September 1970 (1970-09-29) -----	
A	US 3 511 169 A (JONES SELWYN ET AL) 12 May 1970 (1970-05-12) -----	

## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US2004/010857

### Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:  
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:  
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:  
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

### Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☒ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

1-9

#### Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

## FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

## 1. claims: 1-9

A method of processing a food product in a retort vessel comprising :

- (a) placing the food product in a container having a fiber-based material component and sealing the container closed , the container having at least one exposed edge of paperboard ;
- (b) placing the closed container in the vessel and cooking the food product therein including regulating the interior conditions of the vessel using a control temperature and a control pressure ; and
- (c) cooling the food product within the vessel ;
- (d) wherein cooling the food product includes reducing the control temperature within the vessel according to a predefined temperature schedule and reducing the control pressure within the vessel according to a predefined pressure schedule ; at least portions of the pressure schedule following the reduction in pressure resulting from the temperature schedule.

---

## 2. claims: 10-15

A method of batch processing a food product located in a closed container having a paperboard material component , the method comprising :

- (a) closing the container using a packaging method whereby at least one edge of paperboard material is exposed to the conditions exterior to the container , and placing the closed container in a retort vessel ;
- (b) conducting a cooking phase within the vessel ;
- (c) conducting a cooling phase within the vessel , during which the temperature within the vessel is reduced ; during the cooling phase , a pressure exists within the vessel and a pressure exists within the paperboard material at the at least one exposed edge ;
- (d) wherein the cooling phase includes controlling the pressure within the vessel in order to minimize the difference between the pressure in the vessel and the pressure in the paperboard material , thereby helping to prevent moisture from entering into the paperborad of the container.

---

## 3. claims: 16-21

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

In a method of processing a fiber-based container containing a food product , the method including placing the container in a retort vessel , conducting a cooking phase within the vessel , and conducting a cooling phase within the vessel ; an improvement to conducting the cooling phase comprising : actively controlling the vessel pressure to a value equal to or less than pressure in the walls of the fiber-based container during at least a portion of the cooling phase.

---

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US2004/010857

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4874580	A	17-10-1989	JP 4049993 B JP 61001371 A AU 5072185 A AU 620002 B2 AU 6139290 A FR 2565556 A1 GB 2183444 A ,B IT 1185019 B KR 8903699 B1 SE 8502884 A	13-08-1992 07-01-1986 04-06-1987 06-02-1992 29-11-1990 13-12-1985 10-06-1987 28-10-1987 30-09-1989 13-12-1985
US 2398082	A	09-04-1946	NONE	
US 4816269	A	28-03-1989	US 4739699 A US 4788871 A	26-04-1988 06-12-1988
WO 2004056666	A	08-07-2004	SE 523535 C2 SE 0203862 A WO 2004056666 A1	27-04-2004 27-04-2004 08-07-2004
US 6177048	B1	23-01-2001	SE 507521 C2 AP 1112 A AT 229910 T AU 729186 B2 AU 4729997 A BR 9711916 A CA 2268443 A1 CN 1233220 A CZ 9901378 A3 DE 69718071 D1 EP 1015324 A1 ES 2186875 T3 ID 21368 A JP 2001502276 T KR 2000048983 A OA 11114 A PL 332697 A1 RU 2206480 C2 SE 9603782 A WO 9816431 A1 TR 9900818 T2	15-06-1998 11-10-2002 15-01-2003 25-01-2001 11-05-1998 25-04-2000 23-04-1998 27-10-1999 13-12-2000 30-01-2003 05-07-2000 16-05-2003 27-05-1999 20-02-2001 25-07-2000 04-04-2003 27-09-1999 20-06-2003 17-04-1998 23-04-1998 21-07-1999
US 1953656	A	03-04-1934	US 1927043 A	19-09-1933
US 5472042	A	05-12-1995	US 5358030 A DE 4315083 A1 FR 2690984 A1	25-10-1994 11-11-1993 12-11-1993
EP 1287751	A	05-03-2003	JP 2003072716 A EP 1287751 A2 US 2003044312 A1	12-03-2003 05-03-2003 06-03-2003
WO 0228637	A	11-04-2002	SE 522090 C2 AU 9249701 A BR 0114375 A CA 2422809 A1 EP 1326746 A1 JP 2004510603 T	13-01-2004 15-04-2002 03-02-2004 11-04-2002 16-07-2003 08-04-2004

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US2004/010857

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0228637	A	SE 0003554 A WO 0228637 A1 US 2004023045 A1	04-04-2002 11-04-2002 05-02-2004
WO 0222462	A	21-03-2002 AU 8635901 A EP 1324929 A1 JP 2004509025 T SE 0003245 A WO 0222462 A1 US 2003180507 A1	26-03-2002 09-07-2003 25-03-2004 14-03-2002 21-03-2002 25-09-2003
WO 9702140	A	23-01-1997 SE 504524 C2 AU 702390 B2 AU 6323596 A BR 9609466 A CA 2225965 A1 EP 0871570 A1 JP 11508502 T SE 9502393 A WO 9702140 A1	24-02-1997 18-02-1999 05-02-1997 02-03-1999 23-01-1997 21-10-1998 27-07-1999 04-01-1997 23-01-1997
US 5283033	A	01-02-1994 NONE	
US 3531300	A	29-09-1970 NONE	
US 3511169	A	12-05-1970 NONE	



(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
24 February 2005 (24.02.2005)

PCT

(10) International Publication Number  
**WO 2005/016033 A1**

(51) International Patent Classification<sup>7</sup>: **A23L 3/10**

(21) International Application Number:  
PCT/US2004/010857

(22) International Filing Date: 8 April 2004 (08.04.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/621,190 15 July 2003 (15.07.2003) US

(71) Applicant (for all designated States except US): **FMC TECHNOLOGIES, INC.** [US/US]; 200 East Randolph Drive, Chicago, IL 60601 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PERSOONS, Gustaaf** [BE/BE]; Rozenlaan 13, B-2960 Brecht (BE).

(74) Agent: **NAGAE, Jerald, E.**; Christensen O'Connor Johnson Kindness PLLC, 1420 Fifth Avenue, Suite 2800, Seattle, WA 98101 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— with international search report  
— with amended claims

Date of publication of the amended claims: 31 March 2005

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF PROCESSING PAPERBOARD CONTAINERS

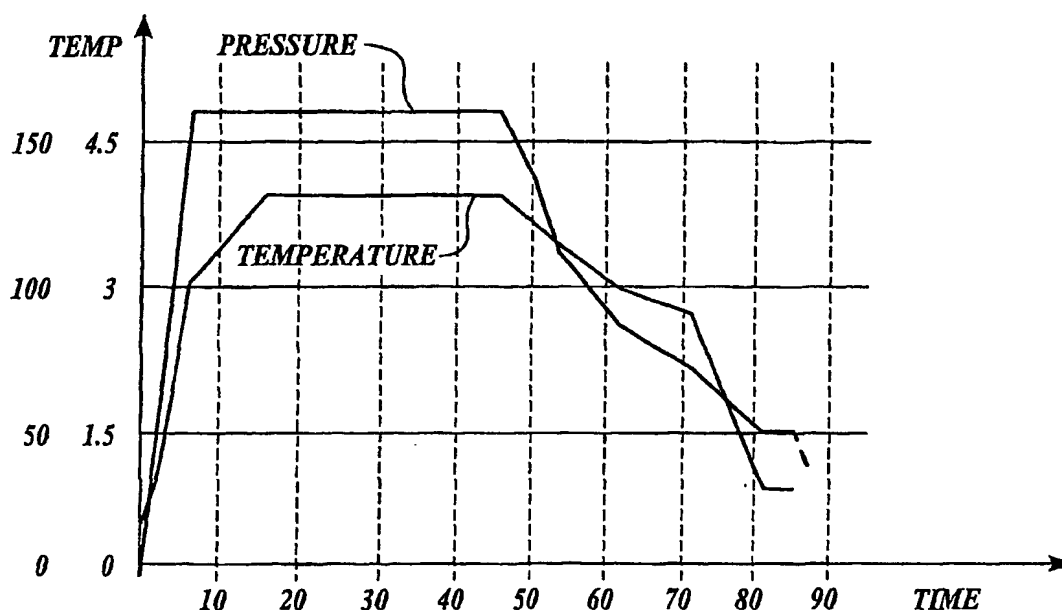

(57) Abstract: Described is a method of processing a fiber-based container in a retort vessel that includes subjecting the container to a cooking phase and a cooling phase. During the cooling phase, the difference between the pressure in the vessel and the pressure in the fiber is minimized and kept preferably negative, thereby discouraging moisture ingress in any exposed fibrous surface.

WO 2005/016033 A1

## AMENDED CLAIMS

[received by the International Bureau on 14 February 2005 (14.02.05),  
original claim 1 amended; remaining claims unchanged (3 pages)]

The embodiments of the invention in which an exclusive property or privilege is claimed are defined as follows:

1. A method of processing a food product in a retort vessel comprising:
  - (a) placing the food product in a container having a fiber-based material component and sealing the container closed, the container having at least one exposed edge of paperboard;
  - (b) placing the closed container in the vessel and cooking the food product therein including regulating the interior conditions of the vessel using a control temperature and a control pressure; and
  - (c) cooling the food product within the vessel;
  - (d) wherein cooling the food product includes reducing the control temperature within the vessel according to a predefined temperature schedule and reducing the control pressure within the vessel according to a predefined pressure schedule, wherein at least part of the time the food product is being cooled said control pressure is less than the pressure within the exposed edge of the paperboard; at least portions of the pressure schedule following the reduction in vapor pressure within the vessel resulting from the temperature schedule.
2. The method according to Claim 1, wherein cooling includes an initial cooling phase and wherein the pressure schedule tracks the corresponding pressure reduction due to the concurrent reduction in temperature during the initial cooling phase.
3. The method according to Claim 1, wherein the method of processing a food product is an agitation method.
4. The method according to Claim 1, wherein the method of processing a food product is a static process.
5. The method according to Claim 1, wherein the pressure schedule follows a theoretical reduction in pressure resulting from the temperature schedule.
6. The method according to Claim 1, wherein during cooling the control pressure is equal to or less than the theoretical pressure resulting from the temperature schedule.

7. The method according to Claim 1, wherein cooling includes reducing the control pressure in the vessel in a ramped manner.

8. The method according to Claim 1, wherein cooking includes using at least one of spray water, trickling water, water vapor, superheated water, steam, and air.

9. The method according to Claim 1, wherein the control pressure reaches an amount greater than 1.1 bar overpressure during the cooking phase.

10. A method of batch processing a food product located in a closed container having a paperboard material component, the method comprising:

(a) closing the container using a packaging method whereby at least one edge of paperboard material is exposed to the conditions exterior to the container, and placing the closed container in a retort vessel;

(b) conducting a cooking phase within the vessel;

(c) conducting a cooling phase within the vessel, during which the temperature within the vessel is reduced; during the cooling phase, a pressure exists within the vessel and a pressure exists within the paperboard material at the at least one exposed edge;

(d) wherein the cooling phase includes controlling the pressure within the vessel in order to minimize the difference between the pressure in the vessel and the pressure in the paperboard material, thereby helping to prevent moisture from entering into the paperboard of the container.

11. The method according to Claim 10, wherein cooling includes reducing the pressure in the vessel at a rate in the range of about 0- bar/minute to about -0.25 bar/minute during a portion thereof.

12. The method according to Claim 10, wherein, during at least a portion of the cooling, the control pressure in the vessel is set to a value less than the pressure in the paperboard material at the at least one edge.

13. The method according to Claim 10, wherein the pressure in the vessel has a rate of reduction of less than about -0.25 bar/minute.

14. The method according to Claim 10, wherein the method of processing a food product is an agitation method.

15. The method according to Claim 10, wherein the method of processing a food product is a static process.

16. In a method of processing a fiber-based container containing a food product, the method including placing the container in a retort vessel, conducting a cooking phase within the vessel, and conducting a cooling phase within the vessel; an improvement to conducting the cooling phase comprising:

actively controlling the vessel pressure to a value equal to or less than pressure in the walls of the fiber-based container during at least a portion of the cooling phase.

17. The method according to Claim 16, wherein the vessel control pressure is set to an amount in the range of about 0 bar to about 0.4 bar less than pressure within the walls.

18. The method according to Claim 16, wherein pressure in the walls is determined based on theoretical calculations.

19. The method according to Claim 16, wherein the cooling phase includes an initial cooling phase, and wherein actively controlling the vessel pressure to a value equal to or less than pressure in the walls of the fiber-based container is done during the initial cooling phase.

20. The method according to Claim 19, wherein the initial cooling phase is equal to or less than about 16 minutes.

21. The method according to Claim 16, wherein the container includes an exposed edge and the vessel pressure is actively controlled to a value equal to or less than pressure in the walls of the fiber-based container at the exposed edge.

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER: \_\_\_\_\_**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**